

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/28350 A2

- (51) International Patent Classification⁷: **A61K**
- (21) International Application Number: PCT/US01/31226
- (22) International Filing Date: 5 October 2001 (05.10.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/684,044 6 October 2000 (06.10.2000) US
- (71) Applicant (for all designated States except US): **ADVANCED MEDICAL APPLICATIONS, INC.** [US/US];
6570 Edenvale Blvd., Eden Prairie, MN 55346 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BABAEV, Eilaz** [—/US]; 5564 Bimini Drive, Minnetonka, MN 55343 (US).
- (74) Agents: **DIPPERT, William, H.** et al.; Cowan, Liebowitz & Latman, P.C., 1133 Avenue of the Americas, New York, NY 10036-3799 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NOZZLE FOR ULTRASOUND WOUND TREATMENT

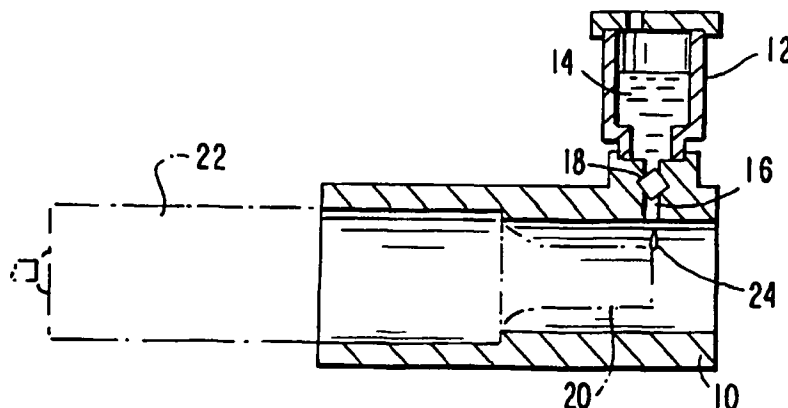

(57) Abstract: A nozzle for ultrasound wound treatment comprising a main body with proximal and distal ends, a reservoir and valve. The proximal end of the nozzle being removably attached to an ultrasound transducer. The distal end of the nozzle being marginally close and coaxial to the free distal end of the ultrasound transducer. The body of the nozzle connected with liquid reservoir, which holds the wound treatment solution and delivers same to the free end of ultrasound tip directly or through a tube. The nozzle is provided with valve for controlling flow rate of wound treatment solution. The nozzle can mix different liquids or a liquid with a gas and deliver same to the wound surface. The nozzle can also be provided with trigger system for one hand use. The present invention is a device, using ultrasonic waves to create, direct and deliver liquid treatment spray to a wound surface.

NOZZLE FOR ULTRASOUND WOUND TREATMENT

FIELD OF THE INVENTION

The present invention relates to a device for using ultrasonic waves in wound treatment. More particularly, the present invention relates to a device for spraying a wound surface using ultrasonic waves for delivering drugs, killing bacteria, cleansing a surface, and stimulating healthy tissue cells.

BACKGROUND OF THE INVENTION

Ultrasonic waves have been widely used in medical applications, including both diagnostics and therapy as well as in many industrial applications. One diagnostic use of ultrasound waves includes using ultrasonic waves to detect underlying structures in an object or a human tissue. In this procedure, an ultrasonic transducer is placed in contact with the object or tissue via a coupling medium and high frequency (1-10 MHz) ultrasonic waves are directed into the tissue. Upon contact with the various underlying structures, the waves are reflected back to a receiver adjacent to the transducer. By comparison of the signals of the ultrasonic wave as sent with the reflected ultrasonic wave as received, an image of the underlying structure can be produced. This technique is particularly useful for identifying boundaries between components of tissue and can be used to detect irregular masses, tumors and the like.

Two therapeutic medical uses of ultrasound waves include aerosol mist production and contact physiotherapy. Aerosol mist production makes use of a nebulizer or inhaler to produce an aerosol mist for creating a humid environment and delivering drugs to the lungs. Ultrasonic nebulizers operate by the passage of ultrasound waves of sufficient intensity through a liquid, the waves being directed at an air-liquid interface of the liquid from a point underneath or within the liquid. Liquid particles are ejected from the surface of the liquid into the surrounding air following the disintegration of capillary waves produced by the ultrasound. This technique can produce a very fine dense fog or mist. Aerosol mists produced by ultrasound are preferred over aerosol mists produced by other methods because

a smaller particle size of the aerosol can be obtained with the ultrasonic waves. One of the major shortcomings of inhalers and nebulizers is that the aerosol mist cannot be directed to a target area without an air stream which decreases the efficiency of ultrasound.

5 Ultrasonic sprayers such as those sold by Sonic and Materials Inc., Misonix Inc., Sono-Tek Inc., and Zevex International, Inc. (see, for example, U.S. Patents: 2,765,606, 4,659,014, 5,104,042, 4,930,700, 4,153,201, 4,655,393, 5,516,043, 5,835,678, 5,879,364, and 5,843,139) operate by passing liquid through a central orifice of an ultrasound instrument-tip. These ultrasonic devices do not have and do not need any removable nozzles to create a liquid spray.

10 Ultrasonic inhalers and drug delivery systems from Medisonic USA, Inc., 3M, Siemens Gmb, The Procter & Gamble Company, Sheffield Pharmaceuticals, and Aradigm, Inc. (see, for example, U.S. Patents 4,294,407, 5,347,998, 5,520,166, 5,960,792, 6,095,141, 6,102,298, 6,098,620, 6,026,808, and 6,106,547) operate by atomizing liquid using piezoceramic film. Although some inhalers and delivery systems use nozzles, the nozzles
15 are just for directing the atomized liquid to the mouth by touching the lips. These nozzles do not create any spray, and the inhaler and drug delivery systems can work without them.

OBJECTS OF THE INVENTION

It is an object of this invention to provide an improved device for treating wounds.

20 It is also an object of this invention to provide an improved device for treating wounds using ultrasonic waves.

It is a further object of the invention to provide a device for creating, directing and delivering liquid aerosol spray to a wound surface.

25 It is yet a further object of the invention to provide a device for creating ultrasonic waves and delivering drugs, killing bacteria, cleansing a surface, and/or stimulating healthy tissue.

These and other objects of the invention will become more apparent from the more detailed discussion below.

SUMMARY OF THE INVENTION

The present invention relates to a device using ultrasonic waves to create, direct and deliver liquid aerosol spray to a wound surface. More particularly, the present invention relates to an emission device comprising a nozzle which is a preferably cylindrical, but
5 optionally can be multiangular, from the inside and is cylindrical, rectangular or multiangular from the outside distal end; a liquid reservoir; and a different shaped proximal end to be removably attached to ultrasound transducer.

The liquid reservoir is provided with a valve, which works as a dispenser and allows liquid to reach the ultrasound tip as drops or via continuous flow through an orifice and a
10 gap.

The proximal end of the nozzle can be connected to the transducer housing in a variety of different ways, such as by threads, bolts or screwed on, snap/friction fit, or by *other means*.

The liquid reservoir portion of the nozzle can be attached to the top, side, or bottom of
15 the nozzle body or located outside the nozzle body. Liquid from the reservoir may be delivered under gravity, or by motorized pump. The liquid reservoir can be elastic or rigid, with or without a cover, and can be made from a variety of different materials, such as, for example, metal, plastic, rubber, ceramic, or other suitable material, and is provided with metered dose device or a liquid dispenser.

20 The liquid reservoir can provide the free end of an ultrasound transducer tip with liquid/solution directly from inside the distal end of the nozzle, or through an orifice or a tube from the front end of the nozzle.

The nozzle can be provided with two, three or more reservoirs or tubes, for mixing different liquids, drugs or liquid(s) with gas. For example, saline can be mixed with oxygen
25 and used to treat a wound. Gas and liquid can be delivered separately from the top, side and bottom of the distal end of the ultrasound transducer to be mixed and sprayed on the wound surface.

The valve part of the nozzle can be located between the reservoir and nozzle body, inside of the reservoir, or inside of the nozzle. The nozzle can optionally be provided with a trigger connecting and operating the valve. This design allows a user to operate the device with one hand. The trigger can be located on the top, side or bottom of the nozzle.

- 5 The nozzle can work without a valve, if, for example, the reservoir is made from an elastic rubber material. In this case liquid from the reservoir is delivered by squeezing the elastic reservoir.

The main body and distal end of the nozzle may be cylindrical, oval, elliptic, conical, rectangular or multiangular from the inside.

- 10 From the outside, the main body and distal end of the nozzle can be any shape such as, for example, a cylinder, cut cylinder, cone, cut cone, concave, double cut, rectangular, multiangular or a combination of these shapes.

- The proximal end of the nozzle can be any shape, but must be removably attachable to the ultrasound transducer, for example, via threads, friction fit, screws, slots, spline, or
15 other means.

The shape of the distal end of the nozzle as viewed from the horizontal side can be cylindrical, a cut cylinder, conical, a double cut cylinder or cone, spherical, elliptic/oval or curved, multiangular, waved or a combination of these shapes.

- Finally the ultrasound wound treatment nozzle can be comprised of many different
20 parts, such as a body/housing, reservoir, valve, and dispenser, or formed in one solid part.

While the invention has been described in general terms, the construction and obvious advantages of the device will be more clearly understood with reference to the following description of the various specific embodiments when read in conjunction with the accompanying drawings.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view of a side elevation of a preferred embodiment of the nozzle and fluid reservoir for ultrasound wound treatment according to the invention.

Fig. 2 a) is a cross-sectional view of the nozzle of Fig. 1 with the liquid reservoir located in the preferred top position.

Fig. 2 b) is a cross-sectional end view of the nozzle of Fig. 1 with the liquid reservoir located in the side position.

5 Fig. 2 c) is another cross-sectional view of the nozzle of Fig. 1 with the liquid reservoir located in the bottom position.

Fig. 2 d) is another cross-sectional view of the nozzle of Fig. 1 with the liquid reservoir located to one side of the preferred top position.

10 Fig. 3 a) is a cross-sectional elevation view of the nozzle of Fig. 1 with the reservoir providing the tip of the nozzle with liquid directly from inside.

Fig. 3 b) is another cross-sectional elevation view of the nozzle of Fig. 1 with the reservoir providing the tip of the nozzle with liquid through an orifice or tube from the front end of the nozzle.

15 Fig. 4 a) is a cross-sectional view of the nozzle of Fig. 1 showing the nozzle with multiple liquid entry points.

Fig. 4 b) is top plan view of the nozzle according to the invention showing three liquid/fluid reservoirs located side by side.

20 Fig. 4 c) is a cross-sectional end elevation view of the nozzle depicted in Figs. 4a and 4b showing the three reservoirs located side by side with three separate entry points located at different points around the nozzle.

Fig. 5 a) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the control valve located within the housing of the liquid reservoirs.

25 Fig. 5 b) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the control valve located outside the body of the liquid reservoir, but within the body housing of the nozzle.

Fig. 5 c) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the control valve located at various points along the transfer tube.

Fig. 6 is a cross-sectional elevation view of the nozzle of Fig. 1 showing the liquid reservoir in the bottom position without a control valve, where the fluid is delivered via squeezing on a flexible liquid reservoir.

Fig. 7 is a cross-sectional side elevation view of the nozzle of Fig. 1 with the fluid reservoir in the top position employing a trigger to open/close the control valve.

Fig 8 a) is a cross-sectional elevation of the nozzle of Fig. 1 showing the distal end of the nozzle with a cylindrical shape.

Fig. 8 b) is a cross-sectional elevation of the nozzle of Fig. 1 showing the distal end of the nozzle with an oval shape.

Fig. 8 c) is a cross-sectional elevation of the nozzle of Fig. 1 showing the distal end of the nozzle with a conical shape.

Fig. 8 d) is a cross-sectional end view of the nozzle of Fig. 1 showing the distal end with a rectangular section.

Fig. 8 e) is a cross-sectional end view of the nozzle of Fig. 1 showing the distal end of the nozzle with a multiangular section.

Fig. 8 f) is a cross-sectional end view of the nozzle of Fig. 1 showing the distal end of the nozzle with an oval section.

Fig. 9 a) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the outside shape of the nozzle as a cylinder.

Fig. 9 b) is a cross-sectional elevation view of the nozzle of the invention showing the outside of the nozzle as a flared cylinder.

Fig. 9 c) is a cross-sectional elevation view of the nozzle of the invention showing the outside of the nozzle having a conical distal end.

Fig. 9 d) is a cross-sectional elevation view of the nozzle of the invention showing the outside of the nozzle with a concave distal end.

Fig. 9 e) is a cross-sectional elevation view of the nozzle of the invention showing the outside of the nozzle with a double cut profile.

Fig. 9 f) is a cross-sectional elevation view of the nozzle of the invention showing the outside of the nozzle with an oval profile.

Fig. 10 a) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a rectangular cut shape.

5 Fig. 10 b) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a cylindrical cut shape.

Fig. 10 c) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a conical cut shape.

10 Fig. 10 d) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a spherical elliptical oval cut shape.

Fig. 10 e) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a concave cut shape.

Fig. 10 f) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a convex shape.

15 Fig. 10 g) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a double cut shape.

Fig. 10 h) is a cross-sectional elevation view of the nozzle of Fig. 1 showing the distal end of the nozzle with a waved cut shape.

20 Fig. 11 is a cross-sectional elevation view of one preferred embodiment of a self destructing disposable nozzle according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is a device which uses ultrasonic waves to create, direct and deliver liquid spray to a wound surface comprising a nozzle. The nozzle for ultrasound wound treatment includes a nozzle body having a proximal end which can be removably
25 attached to an ultrasound transducer, the distal end of said nozzle body to be adjacent to the ultrasound transducer tip. The nozzle comprises a generally cylindrical main body and a

reservoir in which wound treatment liquid/solution is filled and a valve for dispensing and delivering the liquid/solution to the distal end of ultrasound tip.

The invention can perhaps be better appreciated from the drawings. A nozzle for ultrasound wound treatment according to the present invention is illustrated in Fig. 1. More particularly, Fig. 1 depicts a cross-sectional view of a side elevation of a preferred embodiment of the nozzle for ultrasound wound treatment, with a main body 10 of the nozzle, a wound treatment liquid/solution reservoir 12, and a retaining wound treatment liquid/solution 14 which is inter-connected via a tube 16, controlled by a valve 18 to deliver a supply of treatment liquid/solution droplets 24 to the distal end of an ultrasound tip 20 of an ultrasound transducer 22. Wound treatment liquid 14 from reservoir 12 is dispensed and delivered by valve 18 to contact distal end of ultrasound tip 20 and spray onto the wound surface.

Figs. 2 a) -d) illustrate possible locations of liquid reservoir 12 relative to nozzle body 10. The preferred location of reservoir 12 is on the top of nozzle body 10, as illustrated in Fig. 2 a), since this arrangement is most convenient, easy to handle and space-saving. Reservoir 12 may optionally be provided with a cover.

Figs. 3 a) and b) depict alternative cross-sectional views of nozzle body 10 and reservoir 12, providing ultrasound tip 20 with liquid/solution directly and through orifice tube 16.

Figs. 4 a) - c), collectively depict side and end elevation views and top views of a three reservoir system for mixing different liquids, drugs, or liquids and gases, for example, saline with oxygen, and treating a wound. Shown are nozzle body 10 and multiple liquid/fluid reservoirs 12, with liquid/fluid treatments 14 being fed via tubes 16 and controlled by valves 18.

Gas and liquid can be delivered separately from the top, side and bottom of the distal end of the ultrasound transducer to be mixed and sprayed on the wound surface. This design allows one to mix different liquids and/or liquids with gas, such as saline or an antibiotic

with oxygen during wound treatment, without the use of high pressure, which is required with other mixing methods.

Figs. 5 a) -c), collectively depict various locations for the placement of valve 18 between reservoir 12 and tube 16 which delivers liquid/fluid to the distal end of ultrasound transducer tip 20.

To avoid liquid loss during dispensing, the distance from valve 18 to the distal end of ultrasound transducer tip 20 should be minimized. This means that valve 18 should be located as close as possible to the distal end of the ultrasound transducer tip 20. For this reason, the most preferred location is as shown in Fig. 5 b).

Fig. 6 depicts a cross-sectional elevation view of another preferred embodiment of the nozzle of the invention without valve 18. In this configuration reservoir 12 must be constructed of an elastic material and liquid 14 will be delivered to the ultrasound transducer tip 20 by squeezing the walls of reservoir 12. Reservoir 12 can be rigid, but liquid must reach the ultrasound tip 20 using a different means.

Fig. 7 depicts a cross-sectional elevation view of nozzle body 10 with a trigger 26, which is connected and operates valve 18, thus dispensing and changing liquid flow.

Figs. 8 a) - f), collectively depict various alternative preferred nozzle 10 geometries. The shape of the distal end of nozzle 10 from inside can be cylindrical, as shown in Fig. 8 a), conical, as shown in Figs. 8 b) and c), (back or forward), rectangular, as shown in Fig. 8 d), multiangular, as shown in Fig. 8 e), elliptic-oval as shown in Fig. 8 f), or a combination of different shapes. The most preferred shape is cylindrical because of the uniform gap created between distal end of nozzle 10 and cylindrical ultrasound tip 20, with this shape.

Figs. 9 a) - f), collectively depict various alternative preferred nozzle 10 geometries from the outside. The shape of the distal end of nozzle 10 from outside can be cylindrical, as shown in Fig 9 a), conical as depicted in Figs. 9 b)-c), rectangular as shown in Fig. 9), multiangular as shown in Fig. 9 e), elliptic/oval as shown in Fig. 9 f) or a combination of different shapes.

Figs. 10 a) - h) depict cross-sectional elevational views of the distal end of nozzle showing the different shapes possible, a rectangle as shown in Fig. 10 a), cut cylinder as shown in Figs. 10 b) - c), spherical/elliptic/oval as shown in Fig. 10 d), concave as shown in Fig. 10 e), convex as shown in Fig. 10 f), double cut as shown in Fig. 10 g), waved as shown in Fig. 10 h) or a combination of different shapes.

With reference to Fig. 11, shown is one preferred embodiment of a self-destructing disposable nozzle fabricated from one-piece plastic. A trigger 30 with a needle valve 32 connected with reservoir 12 at a point 34 in closing position. After reservoir 12 is filled with liquid and positioning at the wound, trigger 30 is depressed opening valve 32 by lifting.

10 Because of the rigid connection of trigger 30 to reservoir 12, after pushing trigger 30 gets broken at point 34, and after the first procedure is done, will no longer retain the liquid in reservoir 12. Thus, this becomes a one use disposable reservoir/nozzle arrangement.

The preceding specific embodiments are illustrative of the practice of the invention. It is to be understood, however, that other expedients known to those skilled in the art or

15 disclosed herein, may be employed without departing from the spirit of the invention or the scope of the appended claims.

What is claimed is:

1. A nozzle for ultrasound wound treatment, for producing a spray of liquid using an ultrasound transducer tip, directing and delivering said spray onto the wound surface, comprising:
 - 5 a main body having a proximal end that removably attaches to an ultrasound transducer,
said main body also having a distal end which is marginally close to the free distal end of ultrasound transducer tip,
said distal end of said main body having a gap with said distal end of said
10 ultrasound transducer tip,
said distal end of main body being coaxially placed about the said ultrasound transducer tip,
said main body being connected with at least one reservoir, for holding and delivering a wound treatment solution to the distal end or the marginally close radial side of
15 said ultrasound transducer tip.
 2. A nozzle according to Claim 1, wherein said main body is connected with two or more reservoirs, holding and delivering different wound treatment solutions separately to the distal end or marginally close radial side of said ultrasound transducer tip to be mixed and sprayed onto the wound.
 - 20 3. A nozzle according to Claim 1, wherein said main body is connected with at least one reservoir and at least one gas tube, for delivering different wound treatment solutions and gas separately to the distal end or marginally close radial side of said ultrasound transducer tip to be mixed and sprayed onto the wound.
 4. A nozzle for ultrasound wound treatment according to Claim 1 for producing a
25 spray of liquid using an ultrasonic transducer tip, directing and delivering said spray onto said wound surface, further comprising valve for controlling flow rate.


5. A nozzle according to Claim 4, wherein said main body has a trigger for controlling the position of said valve.
6. A nozzle according to Claim 1, wherein a distal end of nozzle from inside is cylindrical.
- 5 7. A nozzle according to Claim 1, wherein a distal end of nozzle from inside is cone.
8. A nozzle according to Claim 1, wherein the distal end of the nozzle from the inside is oval.
9. A nozzle according to Claim 1, wherein the distal end of the nozzle from the
10 inside is elliptic.
10. A nozzle according to Claim 1, wherein the distal end of the nozzle from the inside is rectangular.
11. A nozzle according to Claim 1, wherein the distal end of the nozzle from the inside is multiangular.
- 15 12. A nozzle according to Claim 1, wherein the distal end of the nozzle from the inside is threaded.
13. A nozzle according to Claim 1, wherein the distal end of the nozzle from the inside is combination of different form.
14. A nozzle according to Claim 1, wherein the distal end of the nozzle from the
20 outside is cylindrical.
15. A nozzle according to Claim 1, wherein the distal end of the nozzle from the outside is cone.
16. A nozzle according to Claim 1, wherein the distal end of the nozzle from the outside is oval.
- 25 17. A nozzle according to Claim 1, wherein the distal end of the nozzle from the outside is elliptic.

18. A nozzle according to Claim 1, wherein the distal end of the nozzle from the outside is rectangular.
19. A nozzle according to Claim 1, wherein the distal end of the nozzle from the outside is mutiangular.
- 5 20. A nozzle according to Claim 1, wherein the distal end of the nozzle from outside is a combination of different forms.
21. A nozzle according to Claim 1, wherein the main body of the nozzle has a reservoir on the top.
22. A nozzle according to Claim 1, wherein the main body of the nozzle has a
10 reservoir on the bottom.
23. A nozzle according to Claim 1, wherein the main body of the nozzle has a reservoir on the side.
24. A nozzle according to Claim 1, wherein the main body of the nozzle is connected with the said reservoir via hose/tube.
- 15 25. A nozzle according to Claim 1, wherein the main body of the nozzle has a rigidly connected reservoir.
26. A nozzle according to Claim 1, wherein the main body of the nozzle has an elastic reservoir.
27. A nozzle according to Claim 2, wherein a valve is located in main body of the
20 said nozzle.
28. A nozzle according to Claim 2, wherein a valve is located in the said reservoir.
29. A nozzle according to Claim 2, wherein a valve is located between the said reservoir and said main body of the nozzle.
30. A nozzle according to Claim 1, wherein said nozzle has no valve and liquid is
25 delivered from said reservoir to the distal end of ultrasound transducer tip via a pump or mechanical squeezing.

31. A nozzle according to Claim 1, wherein said nozzle is made from distinct pieces
32. A nozzle according to Claim 1, wherein said nozzle is made from one piece.
33. A nozzle according to Claim 1, wherein the shape of the distal end of the said
5 main body is a rectangle.
34. A nozzle according to Claim 1, wherein the shape of the distal end of the said main body is a cut.
35. A nozzle according to Claim 1, wherein the shape of the distal end of the said main body is a double cut.
- 10 36. A nozzle according to Claim 1, wherein the shape of the distal end of the said main body is a spherical/elliptic/oval.
37. A nozzle according to Claim 1, wherein the shape of the distal end of the said main body is waved.
38. A nozzle according to Claim 1, wherein the shape of the distal end of the said
15 main body is a combination of different form.
39. A nozzle according to Claim 1, wherein the nozzle is self destructing with the first use.
40. A nozzle according to Claim 1, wherein the nozzle is sterile.
41. A nozzle according to Claim 1, wherein the nozzle is sterilizable.
- 20 42. A nozzle according to Claim 1, wherein the nozzle is disposable.
43. A nozzle according to Claim 1, wherein a part of nozzle is disposable.

1 / 10

FIG. 1

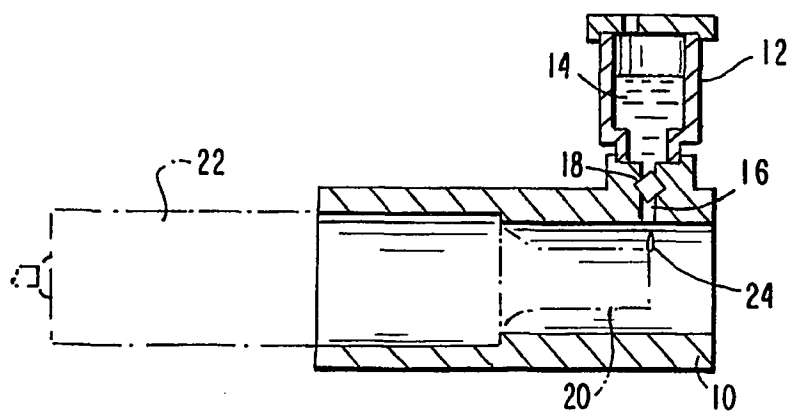

2 / 10

FIG. 2a

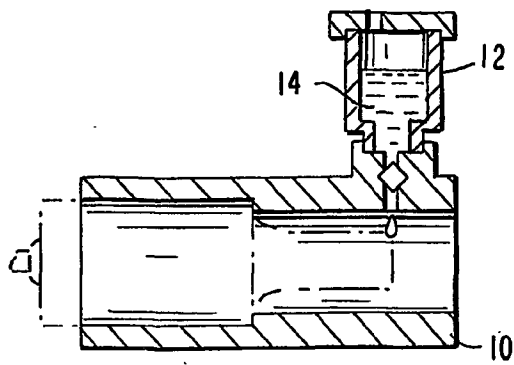


FIG. 2b




FIG. 2c


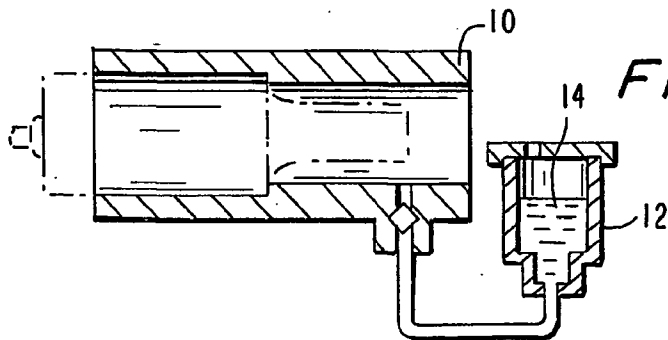


FIG. 2d

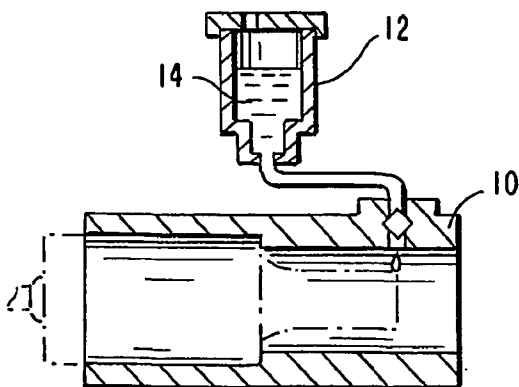

3 / 10

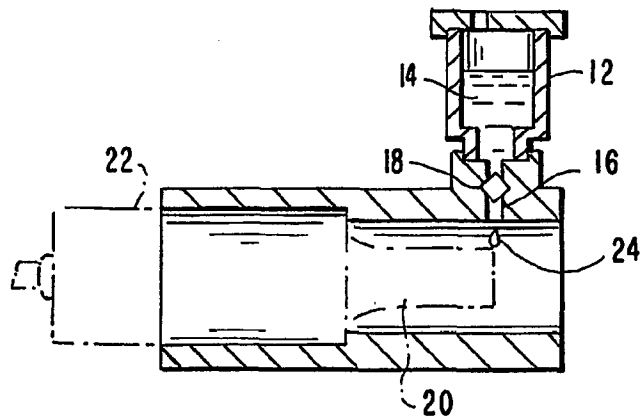


FIG. 3a





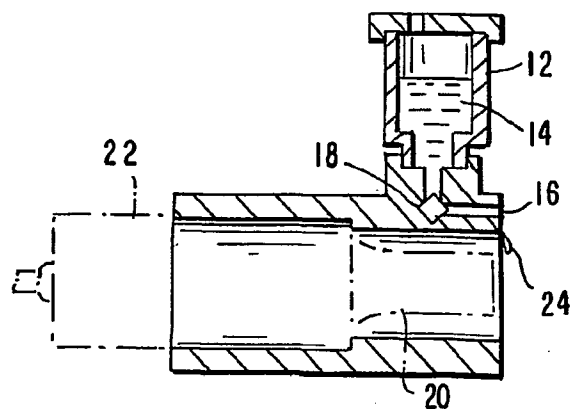


FIG. 3b

4 / 10

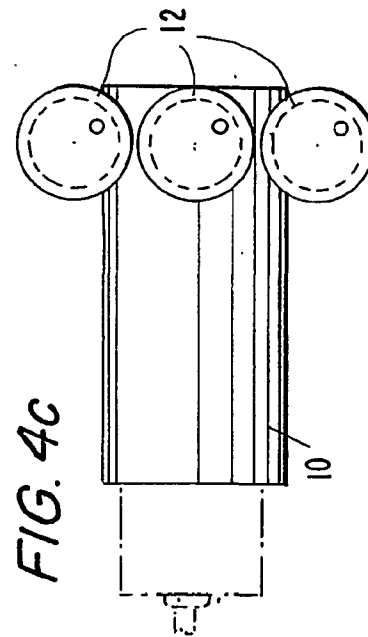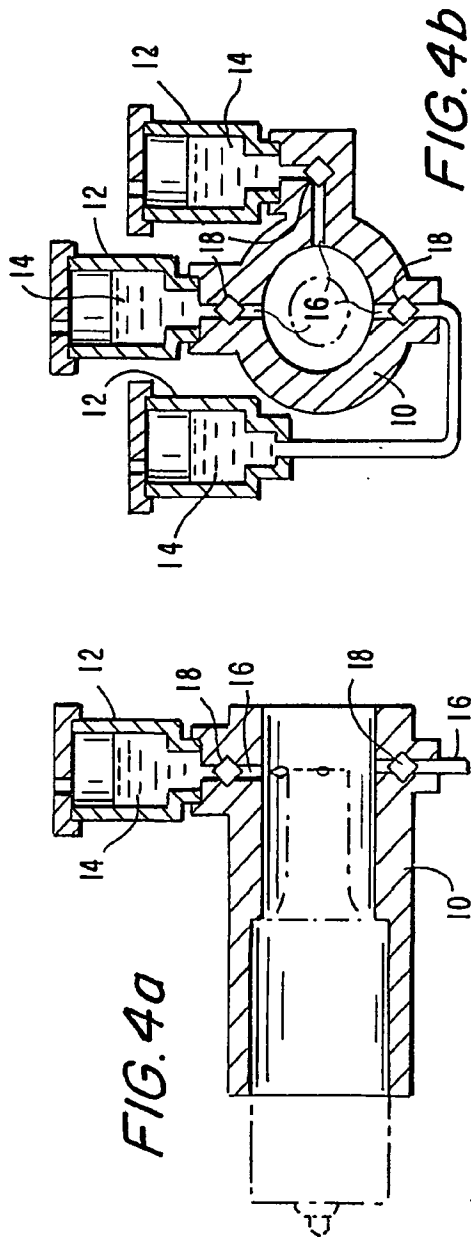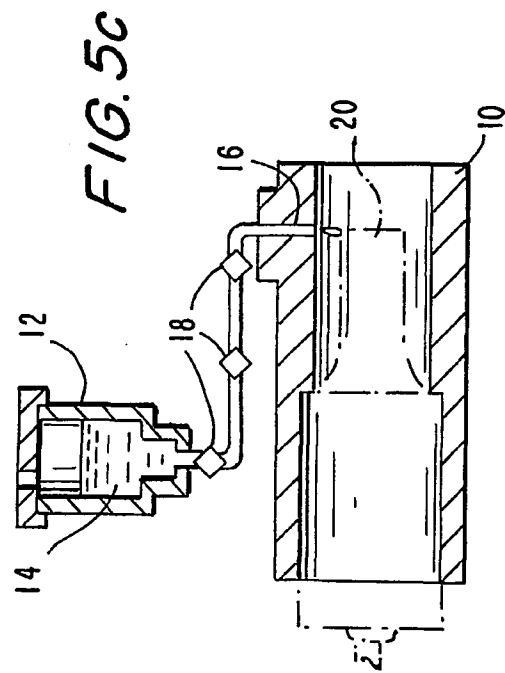

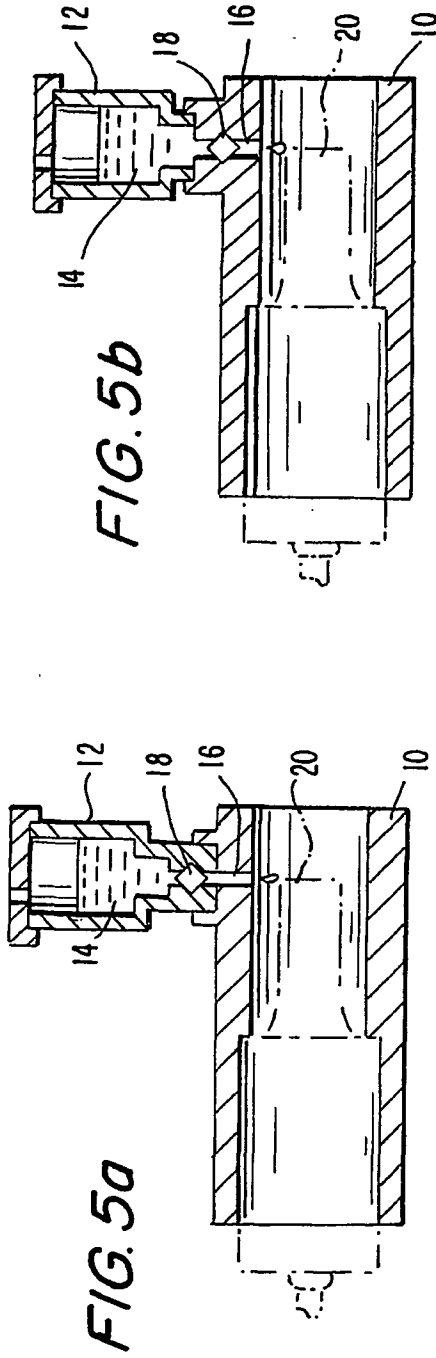

6/10

FIG. 6










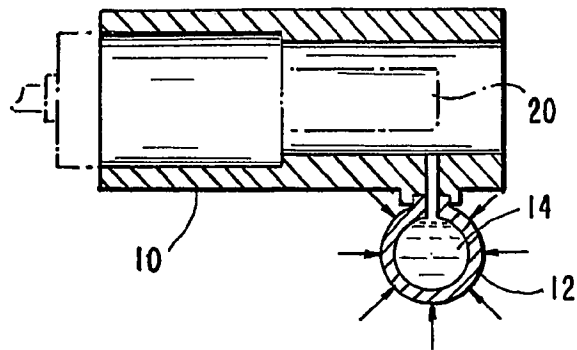


FIG. 7

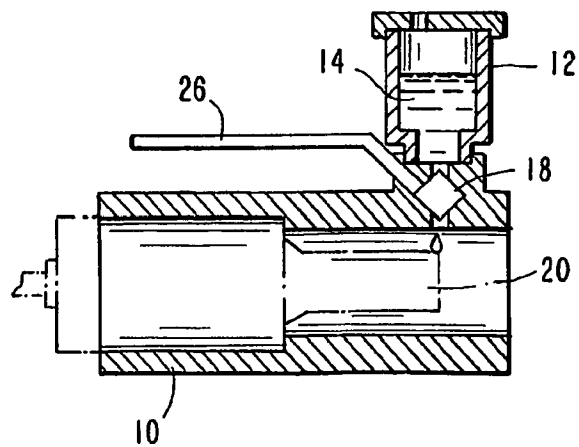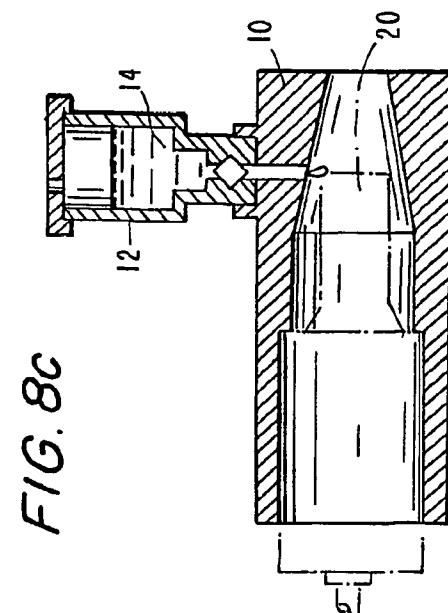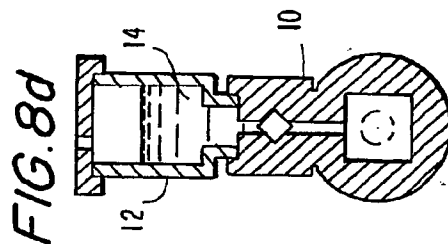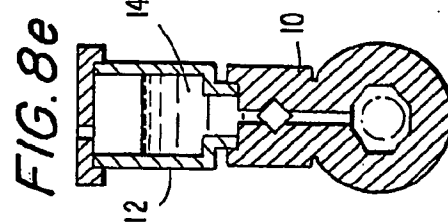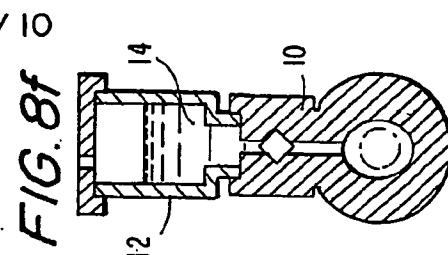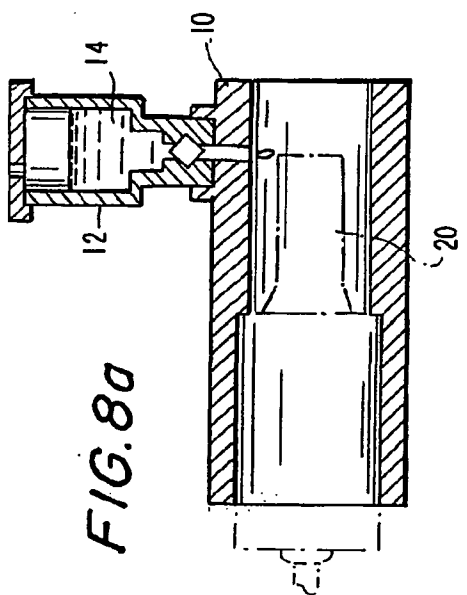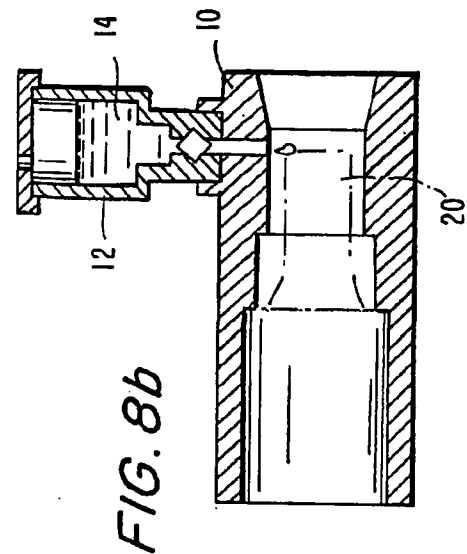

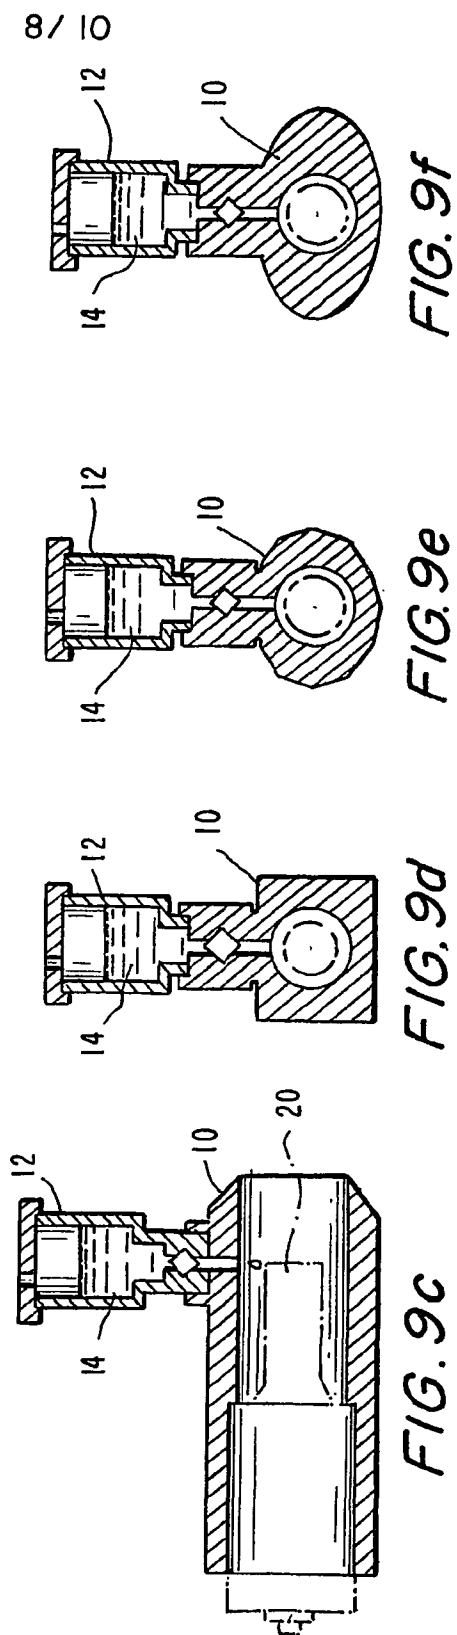

7 / 10

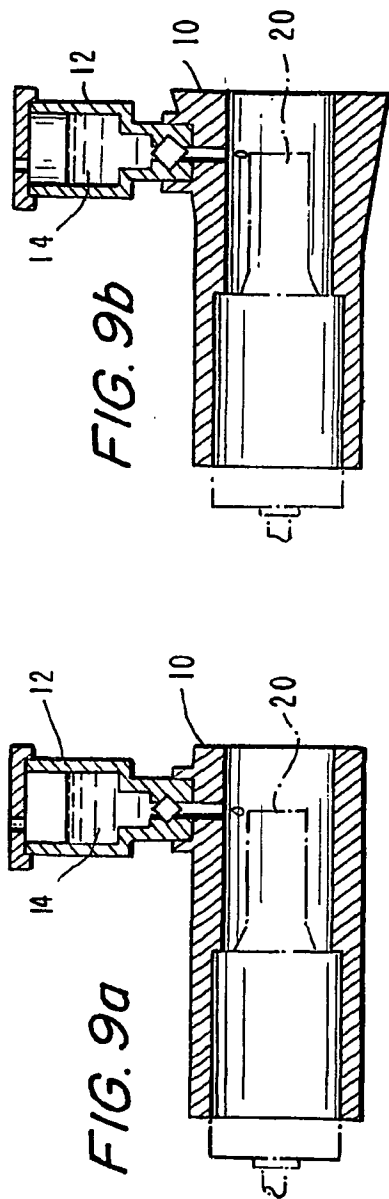

9/10

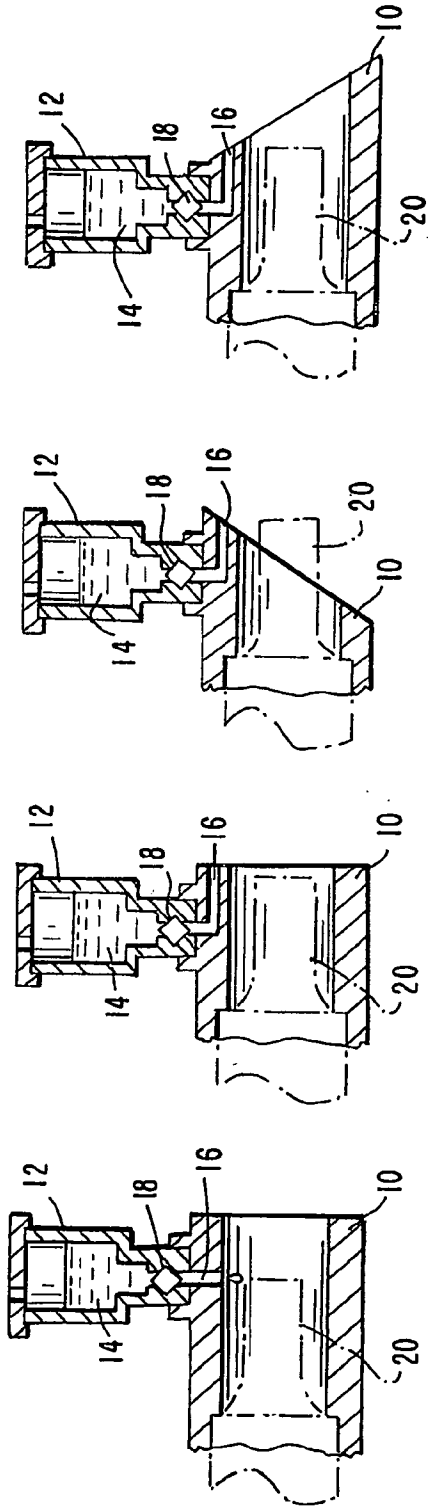


FIG. 10a

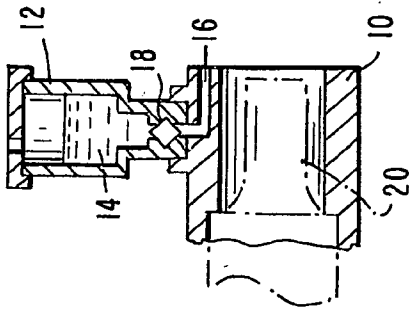


FIG. 10b

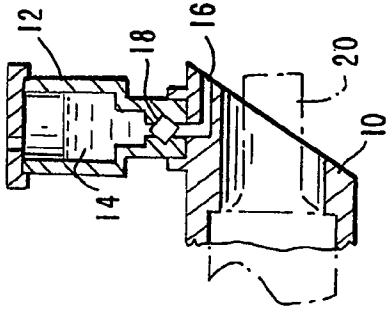


FIG. 10c

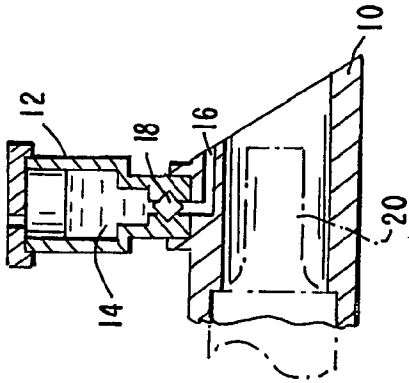


FIG. 10d

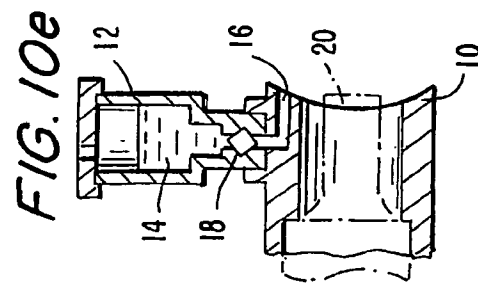


FIG. 10e

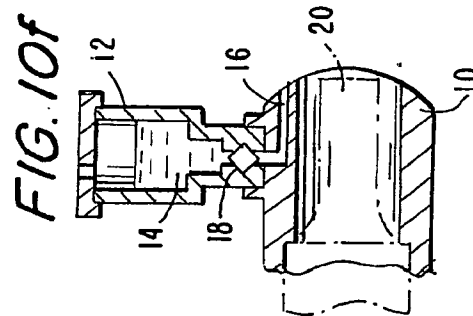


FIG. 10f

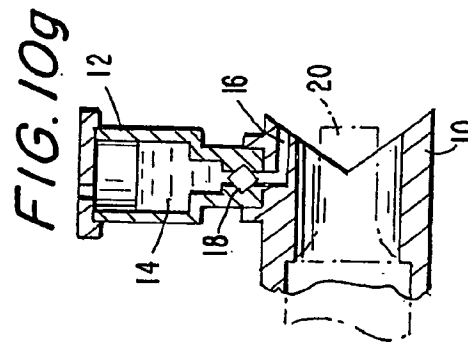


FIG. 10g


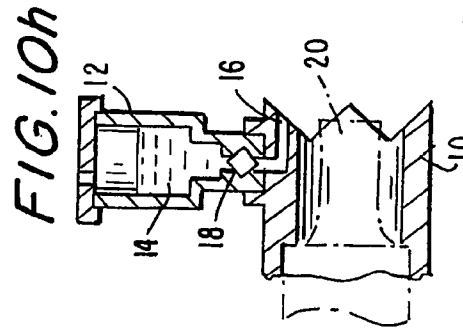


FIG. 10h

10 / 10

FIG. 11

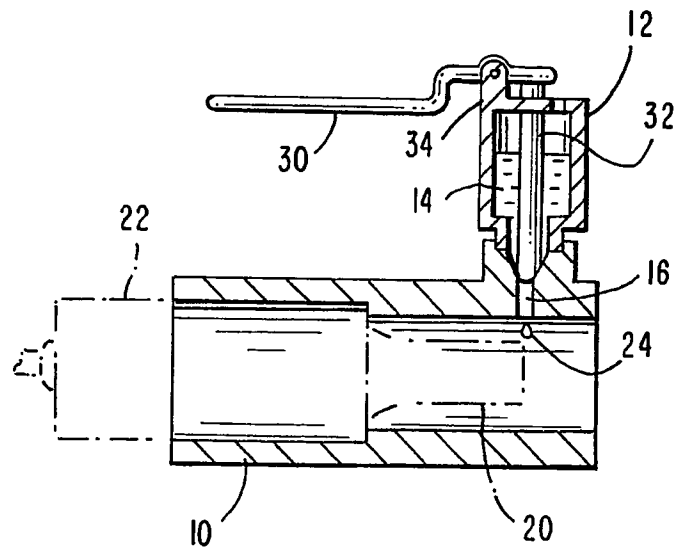

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)


PCT

(10) International Publication Number
WO 02/028350 A2

- (51) International Patent Classification⁷: A61K (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/US01/31226
- (22) International Filing Date: 5 October 2001 (05.10.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/684,044 6 October 2000 (06.10.2000) US
- (71) Applicant (*for all designated States except US*): ADVANCED MEDICAL APPLICATIONS, INC. [US/US]; 6570 Edenvale Blvd., Eden Prairie, MN 55346 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): BABAEV, Eilaz [US/US]; 5564 Bimini Drive, Minnetonka, MN 55343 (US).
- (74) Agents: DIPPERT, William, H. et al.; Cowan, Liebowitz & Latman, P.C., 1133 Avenue of the Americas, New York, NY 10036-3799 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report
- (48) Date of publication of this corrected version: 10 October 2002

[Continued on next page]

(54) Title: NOZZLE FOR ULTRASOUND FOR WOUND TREATMENT

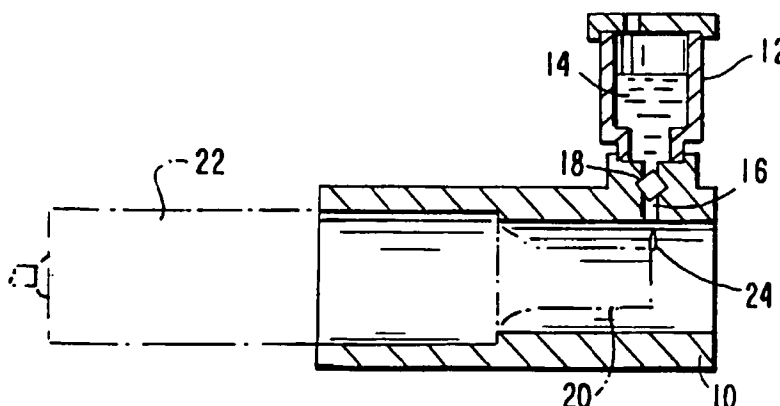

(57) Abstract: A nozzle for ultrasound wound treatment comprising a main body with proximal and distal ends, a reservoir and valve. The proximal end of the nozzle being removably attached to an ultrasound transducer. The distal end of the nozzle being marginally close and coaxial to the free distal end of the ultrasound transducer. The body of the nozzle connected with liquid reservoir, which holds the wound treatment solution and delivers same to the free end of ultrasound tip directly or through a tube. The nozzle is provided with valve for controlling flow rate of wound treatment solution. The nozzle can mix different liquids or a liquid with a gas and deliver same to the wound surface. The nozzle can also be provided with trigger system for one hand use. The present invention is a device, using ultrasonic waves to create, direct and deliver liquid treatment spray to a wound surface.

WO 02/028350 A2



(15) Information about Correction:

see PCT Gazette No. 41/2002 of 10 October 2002, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/028350 A3

(51) International Patent Classification⁷: **A61B 17/20**

(21) International Application Number: PCT/US01/31226

(22) International Filing Date: 5 October 2001 (05.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/684,044 6 October 2000 (06.10.2000) US

(71) Applicant (for all designated States except US): **ADVANCED MEDICAL APPLICATIONS, INC.** [US/US];
6570 Edenvale Blvd., Eden Prairie, MN 55346 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BABAEV, Eilaz** [US/US]; 5564 Bimini Drive, Minnetonka, MN 55343 (US).

(74) Agents: **DIPPERT, William, H.** et al.; Cowan, Liebowitz & Latman, P.C., 1133 Avenue of the Americas, New York, NY 10036-3799 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(88) Date of publication of the international search report:
30 January 2003

(15) Information about Correction:

[Continued on next page]

(54) Title: **NOZZLE FOR ULTRASOUND AND WOUND TREATMENT**

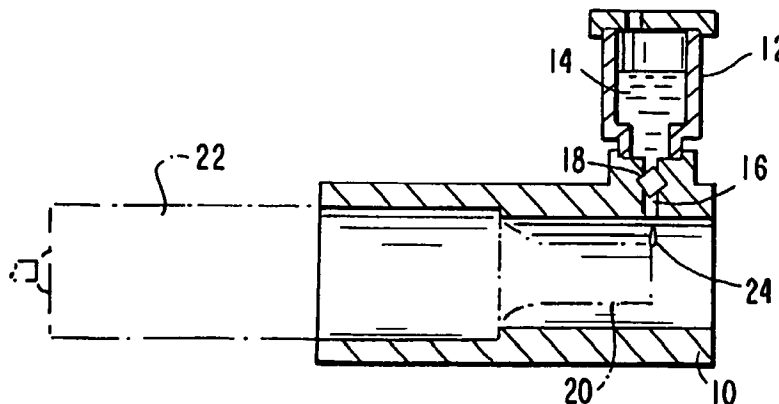

(57) Abstract: A nozzle for ultrasound wound treatment comprising a main body (10) with proximal and distal ends, a reservoir (12) and valve (18). The proximal end of the nozzle being removably attached to an ultrasound transducer. The distal end of the nozzle being marginally close and coaxial to the free distal end of the ultrasound transducer. The body (10) of the nozzle connected with liquid reservoir (12), which holds the wound treatment solution and delivers same to the free end of ultrasound tip (20) directly or through a tube (16). The nozzle is provided with valve (18) for controlling flow rate of wound treatment solution. The nozzle can mix different liquids or a liquid with a gas and deliver same to the wound surface. The nozzle can also be provided with trigger system (30) for one hand use. The present invention is a device, using ultrasonic waves to create, direct and deliver liquid treatment spray to a wound surface.

WO 02/028350 A3



Previous Correction:

see PCT Gazette No. 41/2002 of 10 October 2002, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/31226

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : A61B 17/20

US CL : 604/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 604/20-22; 128/200.14, 200.16; 606/41-42, 45-50; 607/100, 103, 104

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
BRS: ultrasound, reservoir, drug, transducer**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,076,266 A (BABA EV) 31 December 1991, see entire patent.	1-11, 13-25, 31, 33-36, 38-43
A	US 6,104,952 A (Tu et al.) 15 August 2000, see entire patent.	1-43
A,P	US 6,296,630 B1 (Altman et al.) 02 October 2001, see entire patent.	1-43
Y	US 4,726,525 A (Yonekawa et al.) 23 February 1988, see entire patent.	1-43

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

12 November 2001 (12.11.2001)

Date of mailing of the international search report

11 SEP 2002

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Michael Thompson

Telephone No. (703) 308-0858